

PART I

Waste Tyre/Plastic Recycling Project

Feasibility Report



Shangqiu Zhongming Eco-Friendly Equipment Co., Ltd

2020-01-01

CATALOGUE

01 Project Prospect

02 Technical Flow Chart

03 Waste Analysis

04 Raw Material

05 End Production Yield and Usage

06 Energy Analysis

07 Economic-Benefit Analysis

08 Covering Area

09 Why Choose us

10 Success Stories

11 Contact Us



► Project Prospect



Overview

Project Prospect Analysis

Development of industrial has brought social developing, but also bring problems.

On the one hand, the rapid demand growth drives economy; On the other hand, it also creat huge resource consumption and environmental pollution. Faced with the gradual depletion of resources and worsening environment, it is necessary to find ways protecting environment and developing economy. Circular economy will be good for solving this problem. It requires the economy active principal should be "reduction, harmlessness, recycling, reuse and recycling" for recycling waste materials.


Along with the rapid development of automobile industry, new problem can not be ignored, that is the management and treatment of waste tires. Waste tires have strong heat resistance, mechanical resistance and degradation resistance, couldn't be naturally digested for decades. If they are discarded in the natural environment, they will not only occupy land, waste resources, but also creat new 'black pollution'. If incinerate it, will pollute environment seriously; if it is simply treated and then loaded for shipping, also have potential safe hazard; if it is processed and produced by the old way, will not only create pollution but also have very low utilization rate. It has become indisputable reality to realize circular economy and sustainable development in waste tire recycle industry.

Used Tyre Pyrolysis Equipment will solve this problem very well.



► Technical Flow Chart

Technical Flow Chart

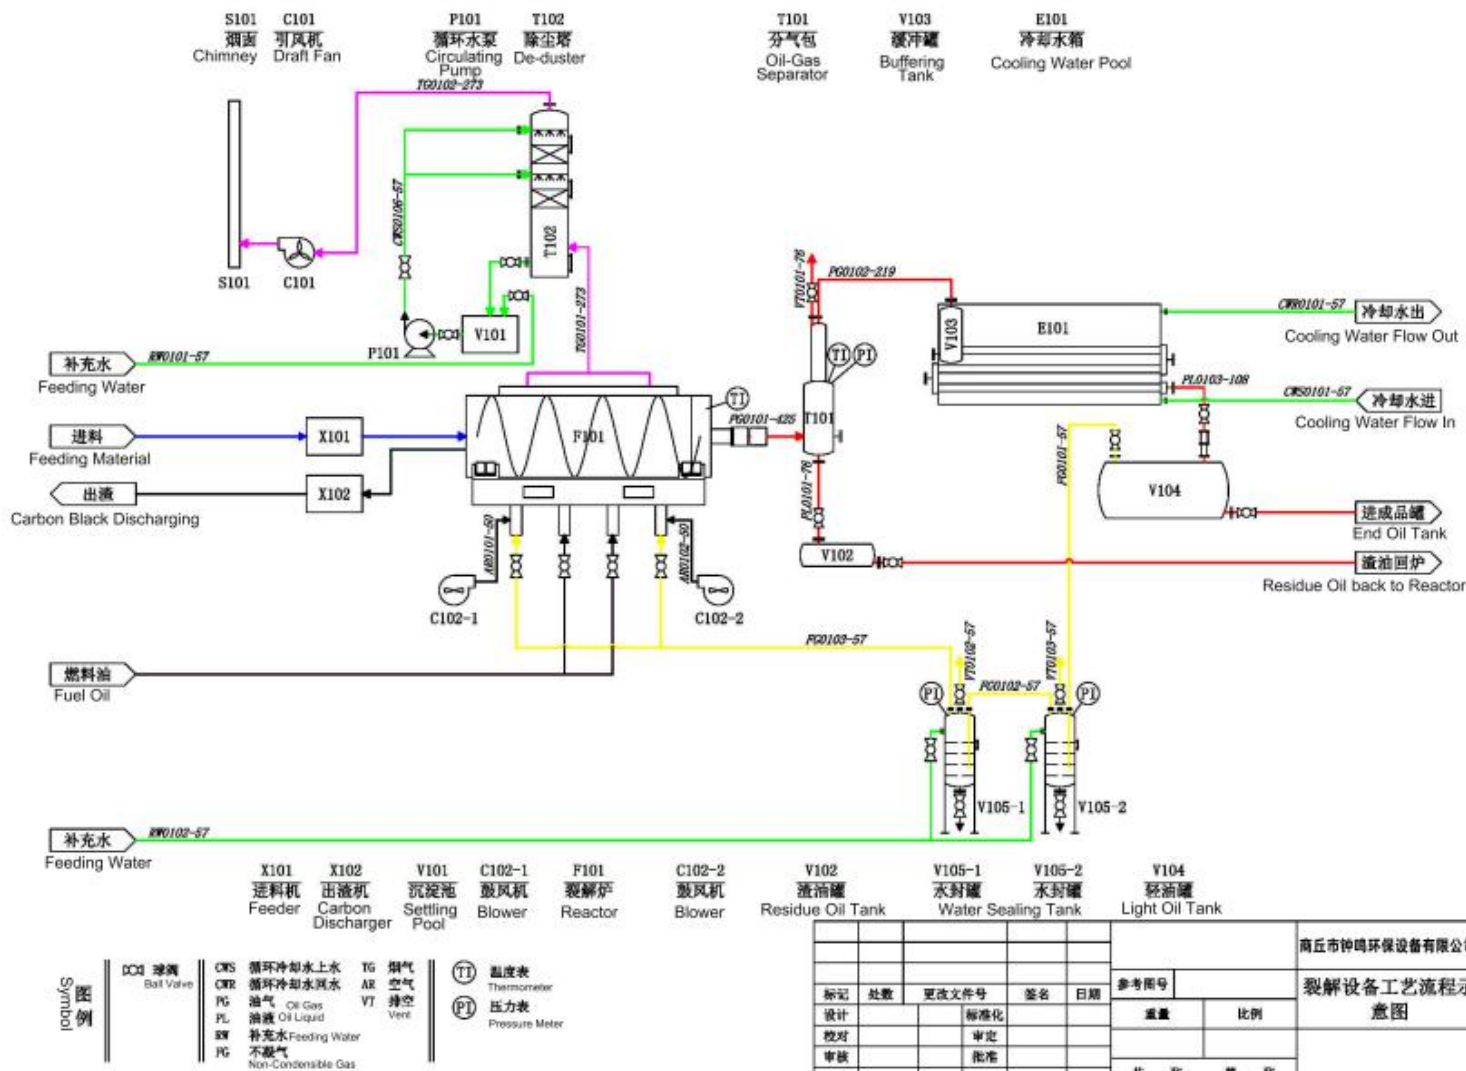

Overview

Technical Flow Chart Description

Step No.	Working Flow	Operating Action
1	Feeding	Put waste tyre in Auto feeder hopper with grappling, feed into reactor via Automatic Hydraulic Feeder, close the feeding door after finishing feeding.
2	Heating	Tyre oil or Non-condensable gas(Extra Non-condensable gas come from other pyrolysis machine running process) heating reactors evenly, after heating around 2 hours temperature up to 260℃,pyrolysis gas come out from oil gas outlet to condenser system to be oil, finally go to oil tank.
3	Syn gas Processing	Along with oil to oil tank, still have Syn gas(C1-C4), the gas will go to heating furnace for heating after treating by 2 layers water sealing system and 1 layer fire arrester system, fully burned via oil burner, by this way, can save most heating fuel.
4	De-Dusting system	All dusts created by heating, extracted by professional draft fan,treated by de-dusting system, after treating, emission will be white steam without black dust, white steam will be further treated by professional industry purification system before emission,ensure final smoke emission meet national standard emission requirement.
5	Slag Discharging (Carbon Black)	After reactor temperature cooling down to be lower than 100℃, open slag outlet, connect with automatic discharge machine with slag outlet, discharged carbon will be delivered to carbon warehouse via vacuum delivery system,ensure no dust fly out while discharging process.
6	Steel Wire Discharging	Open feeding door, take out steel wire with our automatic steel wire discharging machine, equipped with dust extraction equipment while discharging steel wire, ensure no dust fly out while discharging process.

Note: 1) Non-condensable gas is the gas which couldn't be liquefaction under normal pressure;
2)Vacuum Delivery System also named as Vacuum Pneumatic Delivering System.



Waste Analysis and Treatment

Waste Analysis

Heating
Process(Natural
Gas/Pyrolysis Oil)
create the flue gas will
go to professional gas
treatment system via
flue extraction System.

Need circulating water
for cool down the hot oil
gas,water is recycling,
only evaporation, no
loss and no waste water
created.

Noise mainly come
from speed reducer,
draft fan,blowers,water
pumps and oil
pums,all working noise
less than 50db.

Solid waste can also be
named as waste slag, same
as carbon back, has high
recycling value, can be used
as making rubber
production,cable skins, tyre
and ohter plastic productions.

**Waste
Gas**

**Waste
Water**

Noise

**Solid
Waste**



**Raw Material to be
Processed**

Applicable Raw Material



Waste Tyre



OTR



Waste Bicycle Tyre



Waste Plastic



Waste Acrylic




Residue /Heavy Oil



Waste Rubber



Waste Plastic



Waste Cable Skin



Oil Sludge



Waste Leather



Industrial Paint Residue



Waste Sole



Waste Aluminum Foil



Waste Plastic from
Paper mill



MSW



Industrial Waste




Waste Oil Filter



**End Production
Yield and Usage**

End Production Yield and Usage

(Take waste tyre as example)

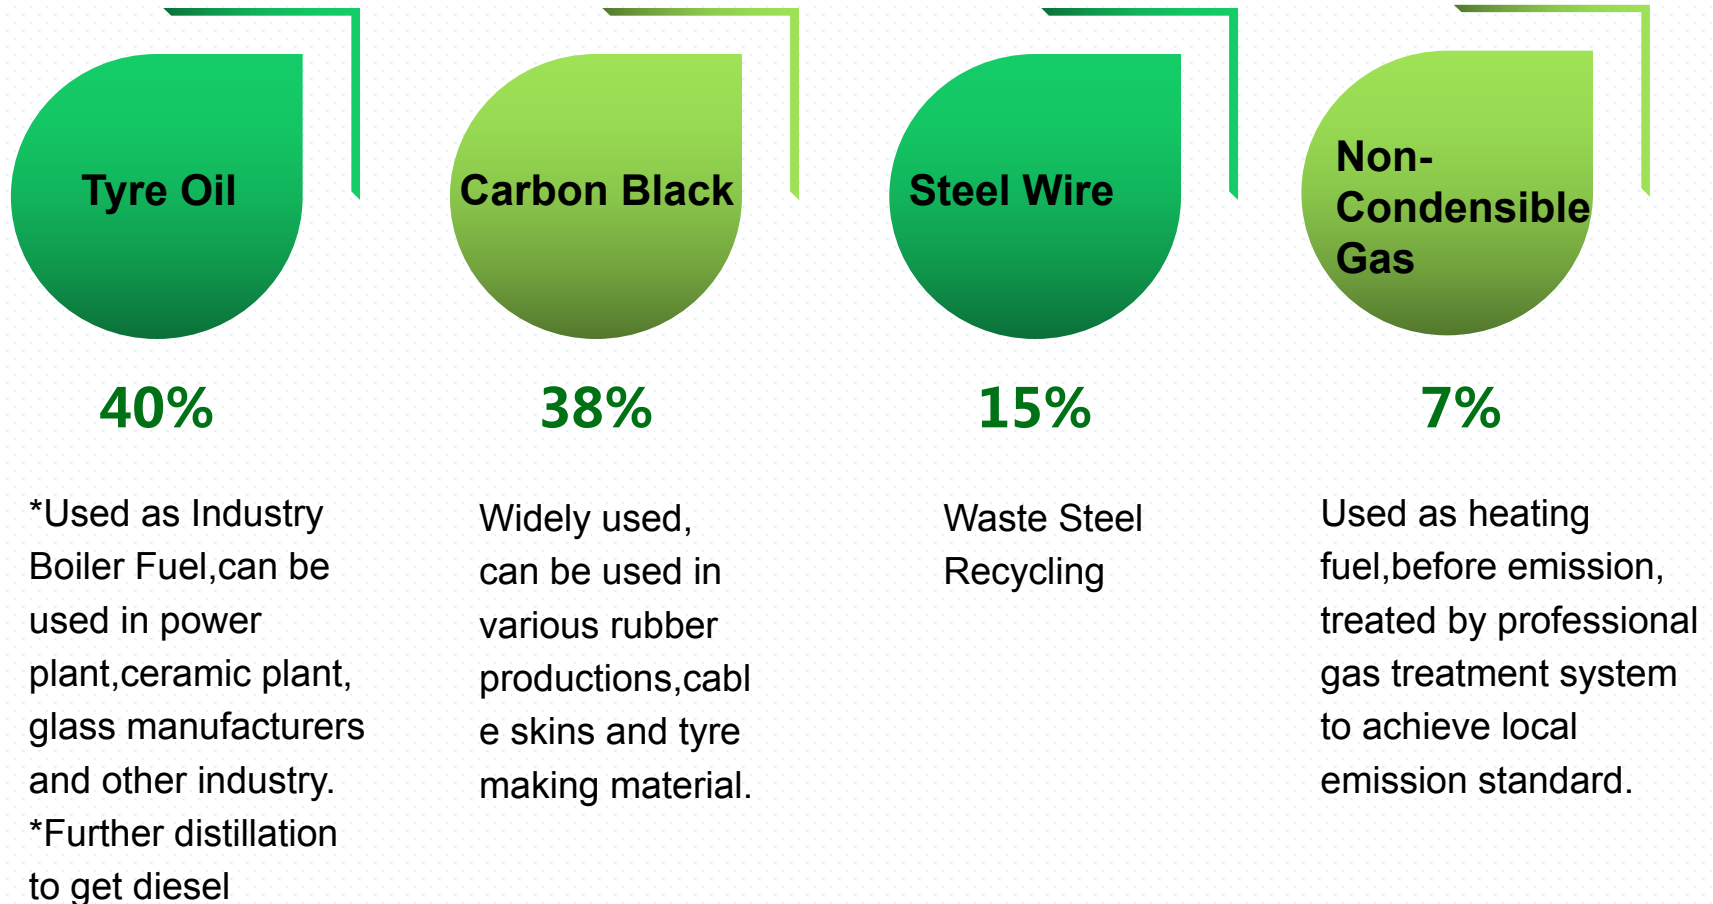


Note: If your raw material is waste plastic, no steel wire produced out, other material same.



► Energy Consumption

Energy Consumption

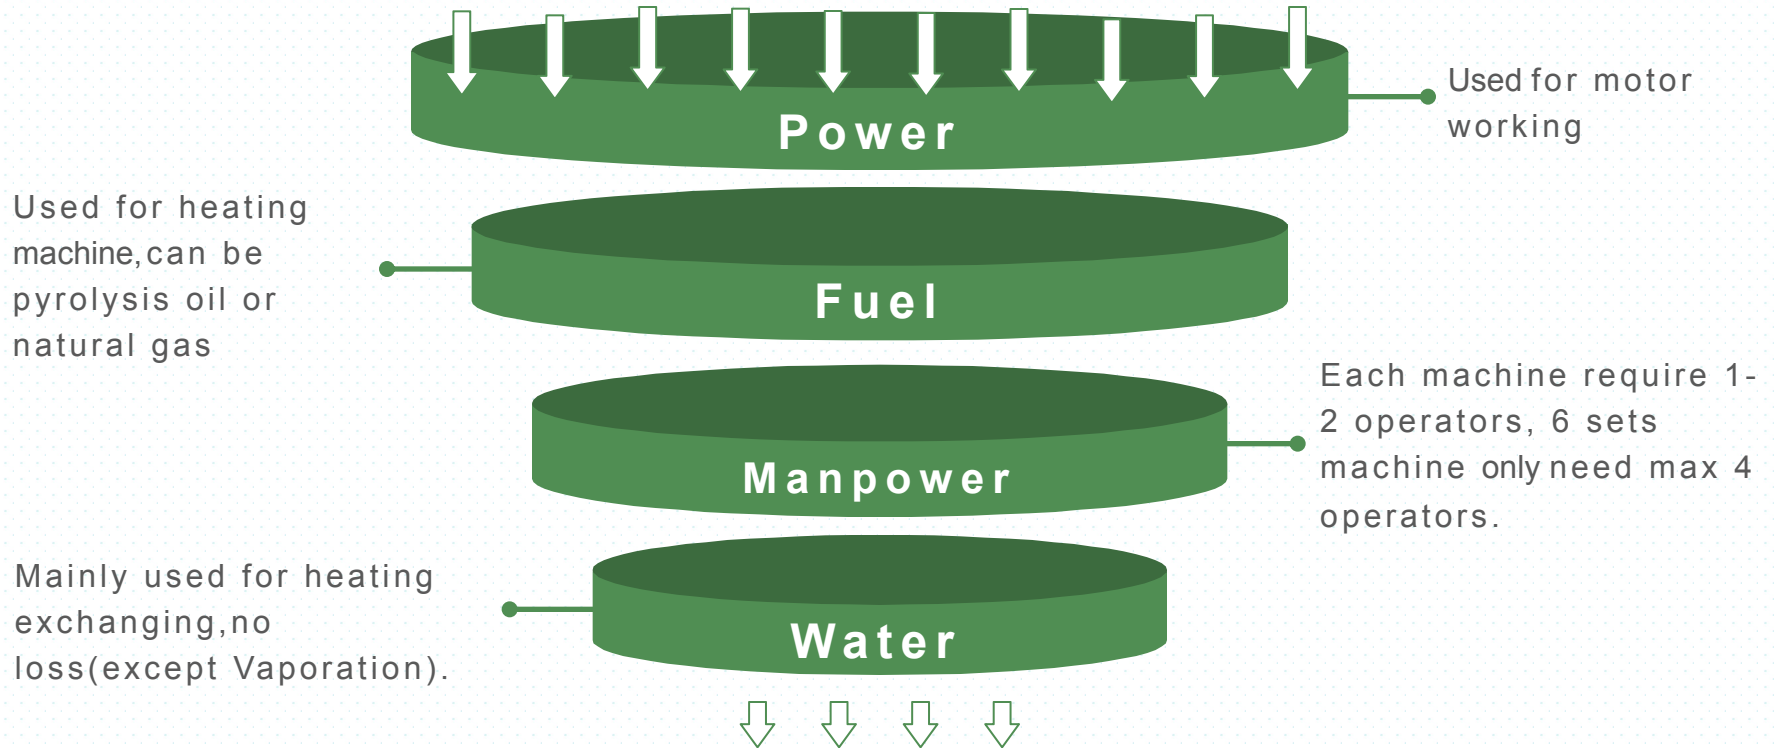

Reference : Averagly process per ton waste tyre, manufacture cost will be around USD 17.00



► Economic Benefit Analysis

Economic-Benefit Analysis(20000 tons per year capacity)


No.	Item Name	6 sets 12TPD capacity
1	Raw Material(Waste Tyre)	900 RMB/T
2	Raw Material	70tons*900RMB/T=63000RMB
3	Labor Cost	7persons*2shifts*250RMB/D=3500RMB
4	Fuel Cost	Pyrolysis Oil 800 kgs (exclude non-condensable gas)
5	Electricity	Around 3000 RMB
6	Daily Cost	69,500.00 RMB
7	Pyrolysis Oil Price	2600 RMB/T
8	End Production (Oil)	70tons*40%=28 tons(minus heating fuel 800kg) , 27.2tons*2600RMB/T=70720 RMB
9	End Production(Steel Wire)	70tons*15%=10.5tons*1400RMB/T=14,700.00RMB
10	End Production(Carbon Black)	70tons*38%=26.6tons*280RMB/ton=7447RMB
11	Daily Output	92,867.00RMB
12	Daily Profit	92,867.00 RMB-69,500.00 RMB=23,367.00RMB
13	Monthly Profit	23,367.00 RMB*25 day/month=584,000.00
14	Yealy Profit (10 months)	Around 5,840,000.00 RMB



8

► **Project Covering Area**

Covering Area

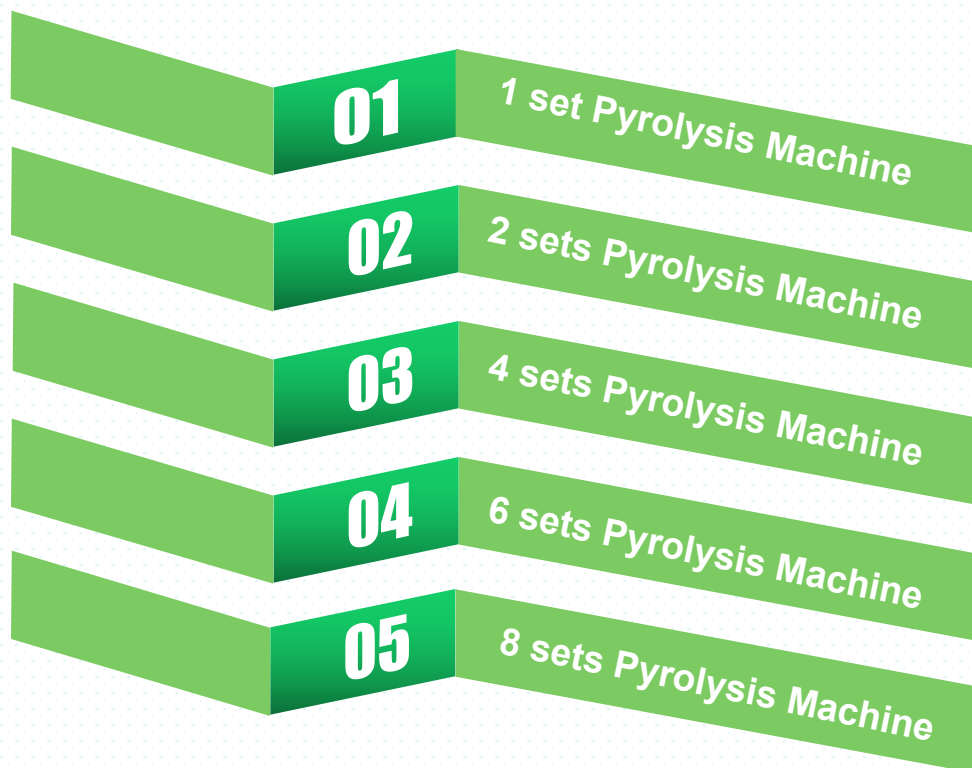

Device Area 300m² (30m*10m*≥6米) Plus Warehouse for raw material and end production totally around 800m²



Device Area 450m² (30m*15m*≥6米) Plus Warehouse for raw material and end production totally around 1500m²



Device Area 900m² (30m*30m*≥6米) Plus Warehouse for raw material and end production totally around 2000m²



Device Area 1800m² (60m*30m*≥6米) Plus Warehouse for raw material and end production totally around 4000m²



Device Area 2400m² (80m*30m*≥6米) Plus Warehouse for raw material and end production totally around 5000m²



9



Success Story

Success Story



Success Story



Success Story



Part II

Waste Oil Distillation Project

Feasibility Report

The background of the slide features a faint, light blue world map. In the lower-left quadrant, there is a small globe showing the Americas, with a small green tree growing next to it. The bottom of the slide is a solid green band.

Shangqiu Zhongming Eco-Friendly Equipment Co., Ltd

2020-01-01

Catalogue

01 Project Prospect

02 Raw material

03 End Production

04 Economic-Benefit Analysis

05 Covering Area

06 Technical Proposal

07 Waste Analysis and Treatment

08 Safety Management

09 3D Finsh Drawing

10 Success Stories



► Project Prospect

Overview

Waste Oil Concept

First is the waste mineral oil or waste engine oil, during using, mixed with impurities such as moisture, dust, other miscellaneous oil, or metal powder generated by abrasion of machine parts;
Second is the engine oil gradually deteriorates, forms organic acids, gums, and asphalt-like substances.

Core Technology

Regeneration of waste oil, means adopt flocculation sedimentation, three removals and three injections. **Atmospheric distillation and high vacuum distillation, catalytic cracking distillation, solvent refining, solvent extraction** and other new process technologies, achieve recovery yield 88%. Eat up all of the waste mineral oil and waste engine oil. With new technology, high vacuum decompression spiral distillation tower and atmospheric spiral distillation tower are our core innovative equipment; removing impurities and toxic material from the used engine oil; Completely knock out the method of acid-alkali washing. Without secondary pollution, converting waste mineral oil and other waste oil to be high-quality diesel and by-products.

Write Basis

1. 《Environmental protection law of the People's Republic of China》 ;
 2. 《Prevention and control of water pollution law of the People's Republic of China》 ;
 3. 《Regulations on environmental protection design for construction projects》 ;
 4. 《Noise standards for industrial enterprises》 ;
 5. 《Design Specification of outdoor drainage》 ;
- etc...

Overview

Background

Waste oil pollutes the Marine and living environment. According to relative statistics, every city can produce 60,000 tons of waste oil every year, totaling over 800 million tons worldwide.

With developing of international economy, the emission of various waste mineral oil or waste engine oil increases greatly, but recovery rate is very few, leading to serious environmental pollution while waste the available petroleum resources. In accordance with the international spirit of vigorously promoting circular economy, energy conservation and emission reduction, determined to speed up the operation and construction of this environmental protection project, so that the precious renewable oil resources create greater social and economic benefits.

Necessity

As we all know, energy is one of the five essential factors for human survival, petrochemical industry is an important pillar industry of the national economy. Petroleum products are named as "blood" of international economy.

Oil is non-renewable resource. Low prices cannot be maintained for long time. With the development of economy, oil trend must be gradually upward. On the other hand, waste oil, as a raw material, declined sharply with the lower oil price. The technology of producing diesel oil from waste oil has been with low cost, stable profit and long-term trend.

To sum up, construction of this project is necessary. Once finish this project, will be conducive to local economic development and environmental protection.

Fields of Study

Research scope of this feasibility study report includes: project prospect analysis, environmental protection solution, source of raw materials, end products, energy consumption, covering area, benefit analysis, 3D finish diagram, success stories, etc., **for customer decision-making.**



02

► **Applicable Raw Material**

Type of Raw Material



Source of Raw Material



4S Shop
or other Garage




Tyre/Plastic Oil Manufacturer



Oil Middleman



Waste Oil come from big
Refinery Plant

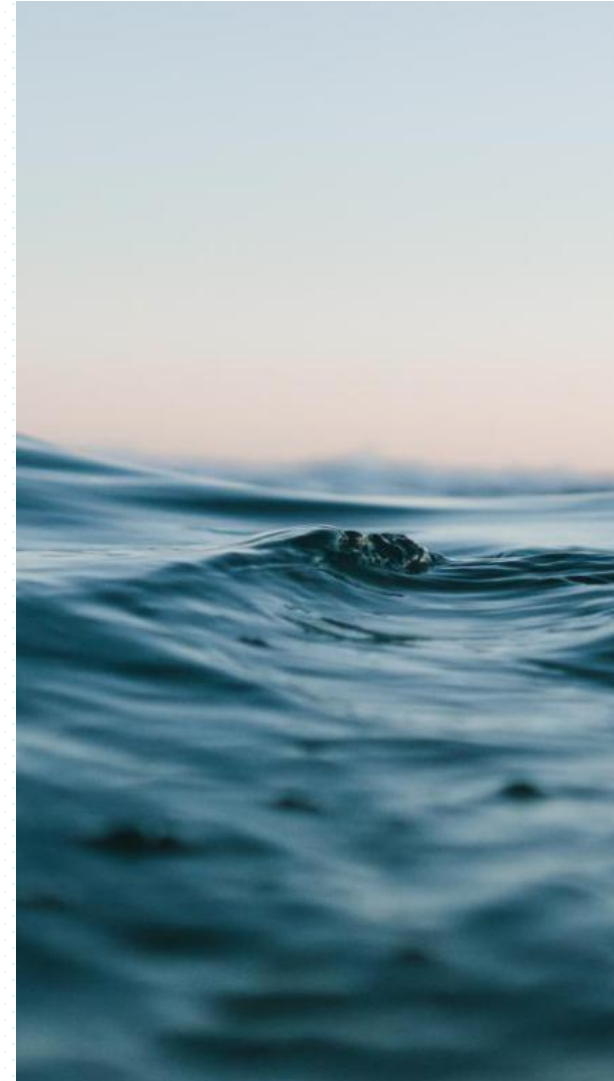




03



End Production

End Production Yield

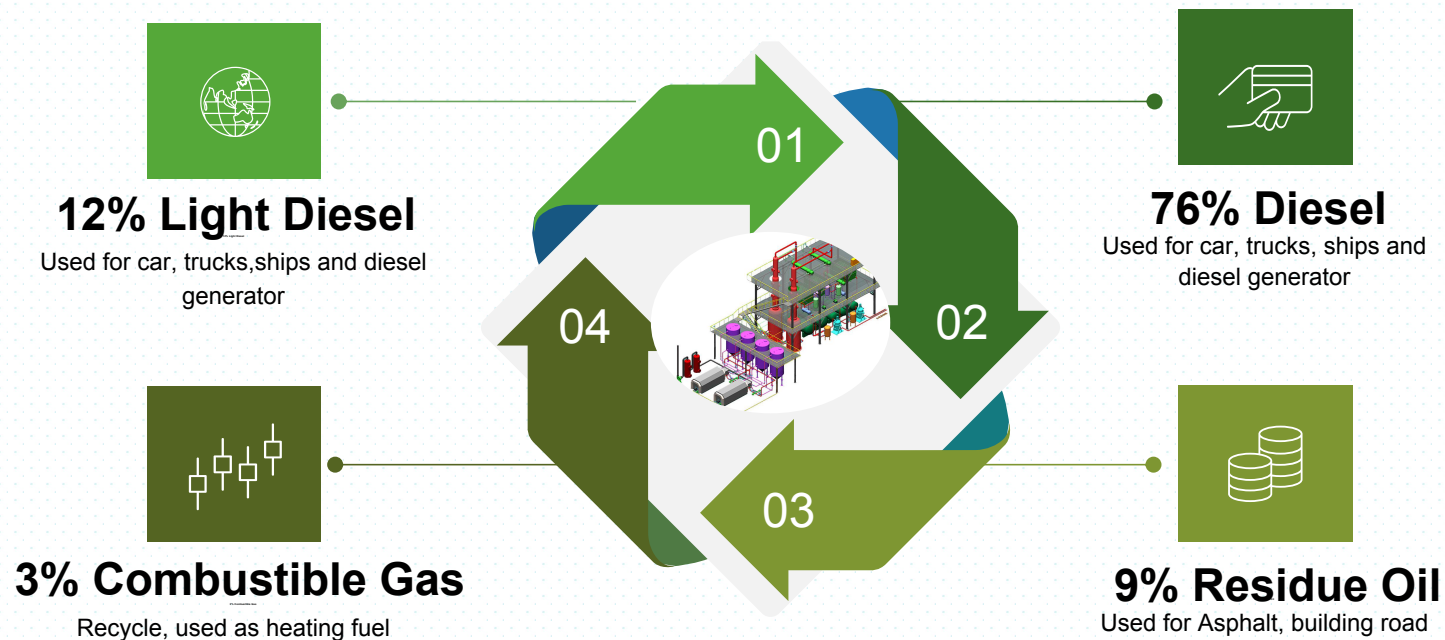

End Production Usage

Car/Trucks

Used for Car diesel , meet local diesel standard



Boats

Used for boat as power oil, meet boat diesel requirement.



Diesel Generator

Quality meet generator require quality



Light Fuel Oil

Used as fuel oil, meet fuel oil standard quality






04




Economic Benefit Analysis

Energy Consumption

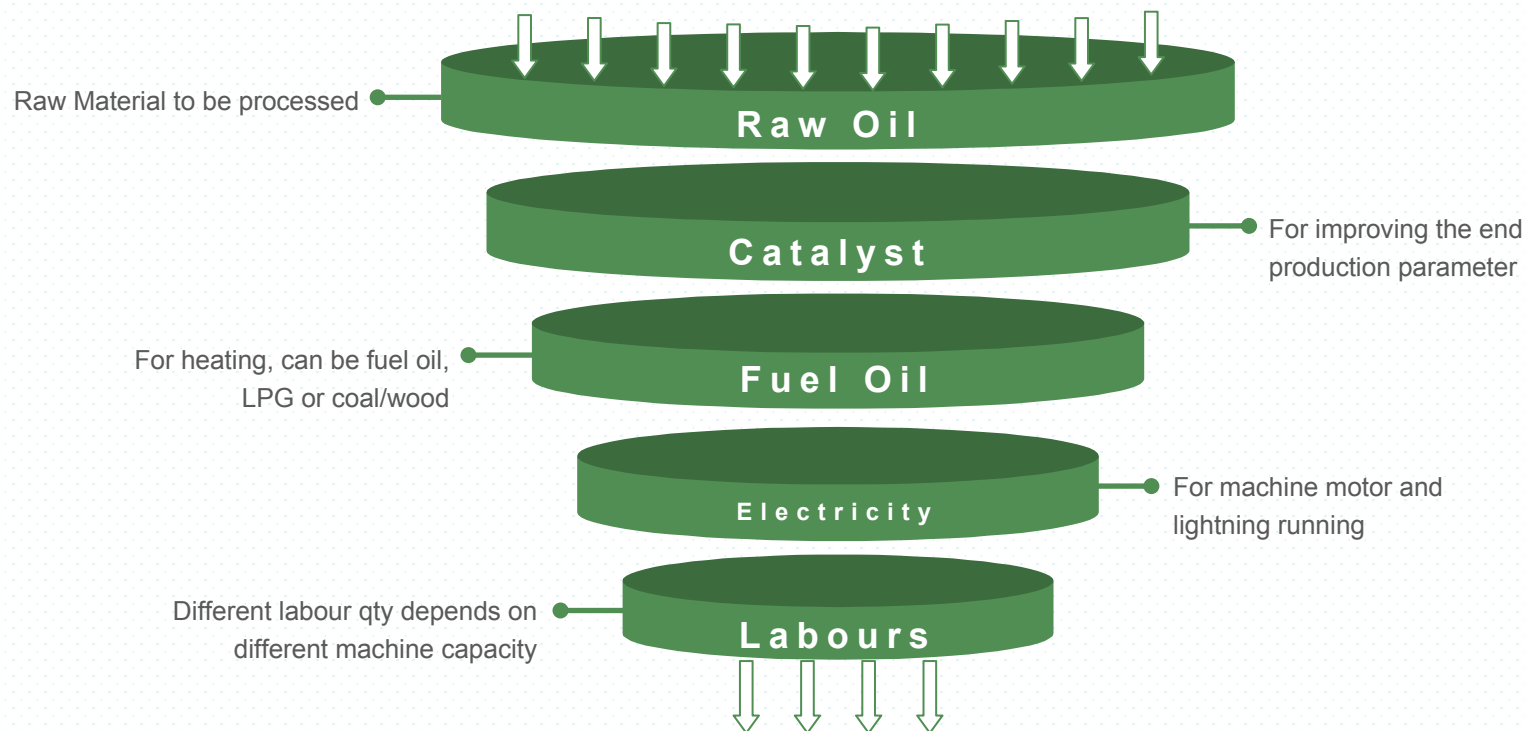

Note: Investor can calculate above cost by RMB 350.00 for processing per ton waste oil. Catalyst can be regenerated and recycled, so actually the cost will be lower in practical production.

Energy-Saving Measures

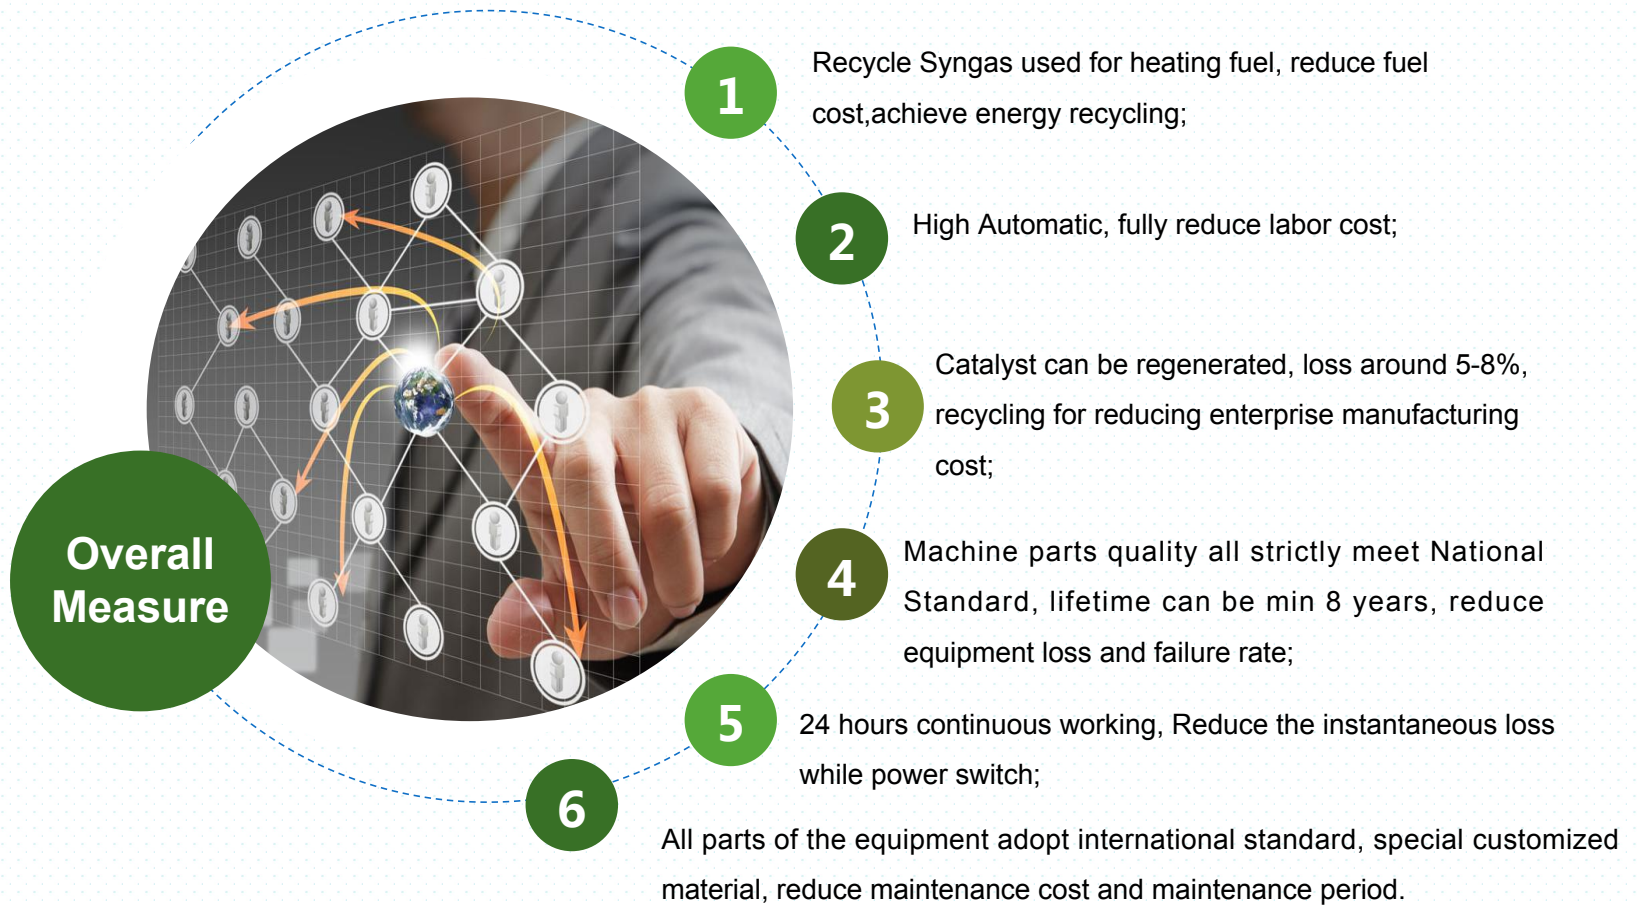



05



Covering Area

Project Covering Area



5-10TPD

720m² (L36m/W20m/H10m)

10-20TPD

900m² (L45m/W20m/H10m)

30-40TPD

1200m² (L40m/W30m/H11m)

50TPD


1500m² (L50m/W30m/H11m)



06


► **Technical Proposal**

Principal for Technical

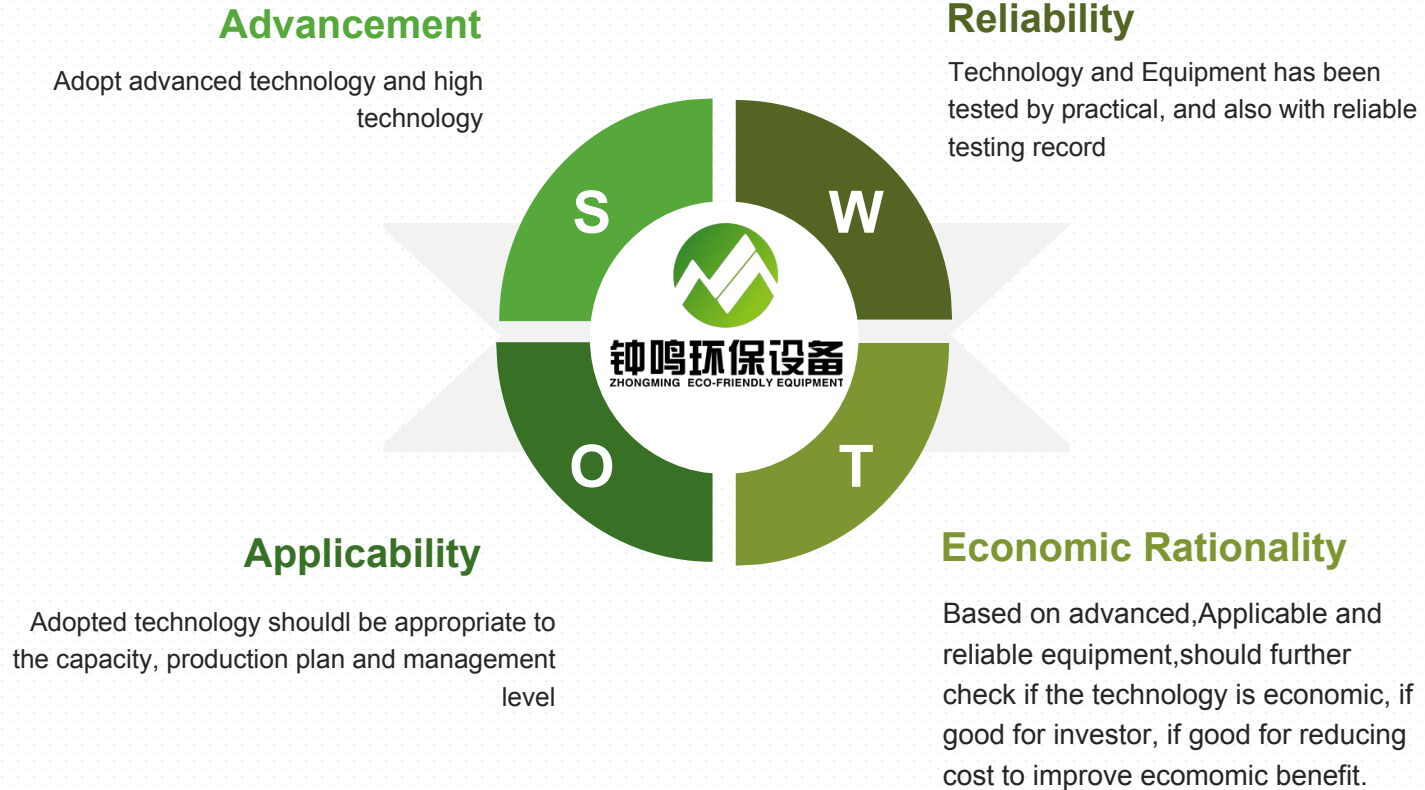

Tech. Flow Chart

- (1) Adopt the Atmospheric Distillation and Vacuum Distillation, Catalytic Cracking distillation, Solvent Refining and Solvent Extraction, etc... new technology.
- (2) Adopt Self developed catalyst, composite filter material and other creative technology to ensure end production quality.

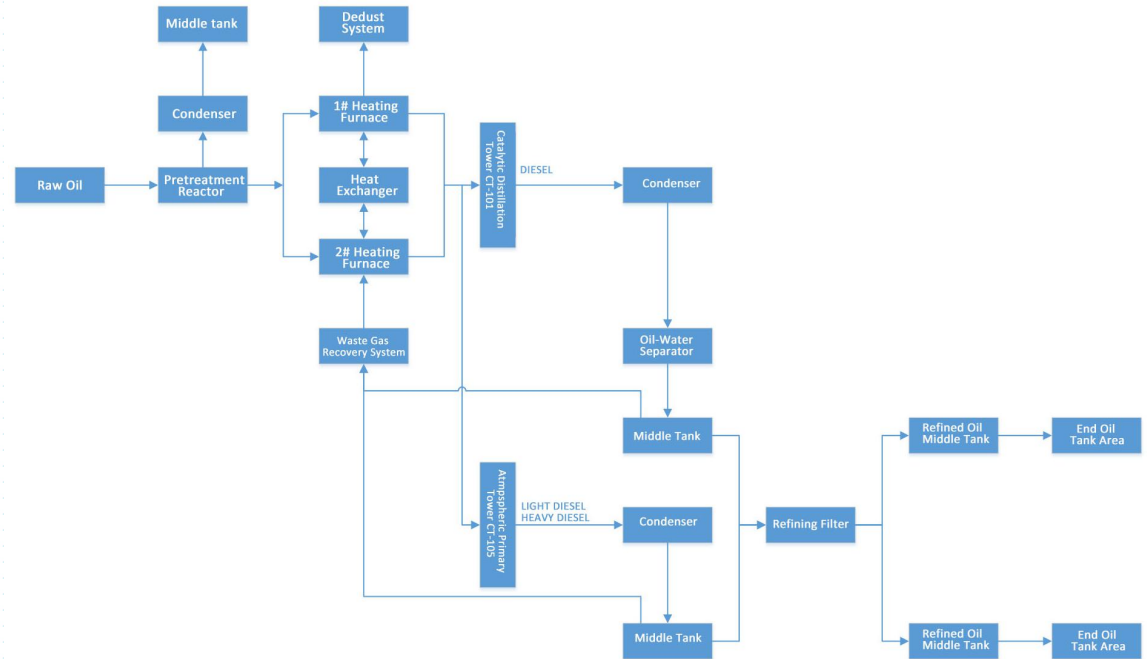

Brief Process Description

- This Project belongs to: New Energy Eco-friendly, waste resource recycling project. After searching from International info, this technology has been most advanced;
- Adopt the Atmospheric Distillation and Vacuum Distillation, Catalytic Cracking distillation, Solvent Refining and Solvent Extraction, etc... and other new technology;
- Adopt Self developed catalyst, composite filter material and other creative technology to ensure end production quality.
- High efficient spiral fractionation tower is of tongue type tray, rotating 22.5° -- 30° when higher each layer, making the upturned tongue wings change angle while tower tray rotating. Each rotation of the tray is equivalent to 10 times the distance of the conventional gas curve, increasing the yield and mass.
- Drip needle set up with atmospheric horizontal cracker, so that the liquid generated by the cracker gas drop through the gas zone, drip into the high-temperature liquid surface. Speed up the cracking speed and increase the output extra 7%.
- This technology mainly based on the decomposition principle of polymer compounds, through professional crackers, primary distillation towers, high-efficiency atmospheric spiral fractionation towers, high vacuum decompression spiral rectification towers, stripping towers, catalytic reactors, condensers, solvent refining equipment, Coking catalyst tower and other patented equipment, unique design, national initiative, unique technology, one-step processing with comprehensive chemical and physical reactions for waste mineral oil, waste engine oil and other waste oil, produce Naphtha, diesel, other industrial fuel oils and by products.

Advantage Analysis

1

Advanced Technology

Sourcing from September 2004 international test reports and search reports, conclusion is that the technology is novel, innovative and practical for industrial production.

2

Environmental

Our technology process has no exhaust gas, waste water and waste residue discharge, waste oil recovery rate 100%.

3

Safe and Reliable

Five safety measures are equipped by our equipment, also with self-control, semi-automatic, modern automatic alarm system, pressure control operating system

4

Low Production Cost

Utilization of waste, waste gas recycle as heating fuel, 100% eat up and clean up the waste oil; waste water recycle as as cooling water after treatment, reduce production cost significantly.

5

High Yield

Our technology has high cracking yield, good catalytic effect, and high fractionation accuracy, which improves the total yield from original 80% to 90%.

6

Mass Balance


Raw Material is Waste engine oil and other waste oil; End production is diesel and other by production.



07

► Waste Analysis and Treatment

Eco-Friendly

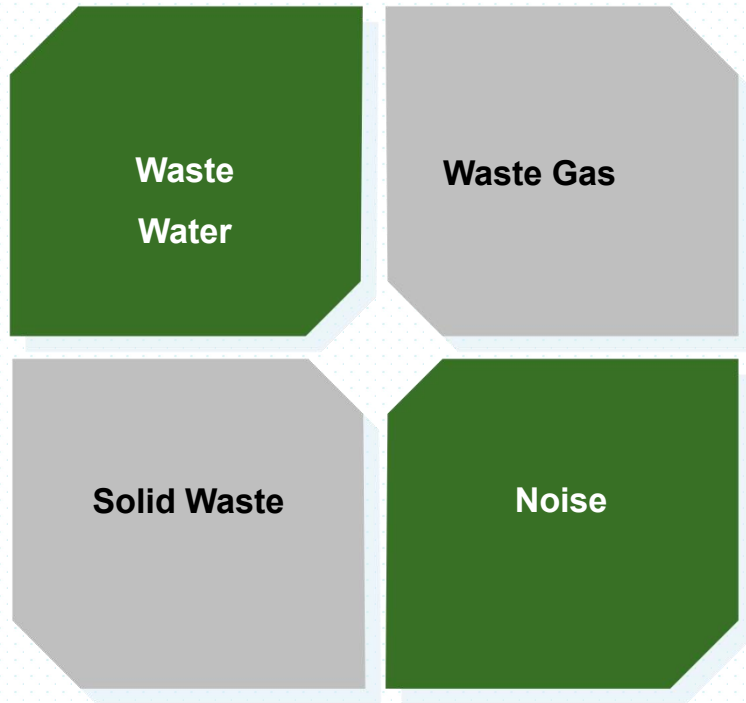

Our technology has no waste gas, waste water or other solid waste discharge, and the waste oil recover rate is 100%, no second time pollution. Processed waste mineral oil and other waste oil can get base oil and diesel as main production, quality can meet international standards.



Source of Waste

- Combustible Gas come from machine running(C1-C4 Alkane)
- Smoke Exhaust come from heating process, Organized emission from device area.

**Waste
Gas**

- Waste water produced by raw oil flocculation and sedimentation pretreatment tank

**Waste
Water**

- Noise mainly generated by draft fan, raw oil pre-treatment configuration air compressor, raw oil pump, high temperature oil pump, circulating water pump, and raw oil and end production loading and unloading pump.


Noise

- Solid wastes produced by the proposed project are mainly smoke dust, waste catalyst and domestic garbage

**Solid
Waste**

Waste Process

- Non-condensable gas 100% fully recycle as heating fuel, after treated by three-stage desulfurization filtering device, fully enclosed safety water sealing tank and flame arrester
- Smoke Emission can be standard discharged, through below treatment: three-stage tower type spray desulfurization, filtration and dust removal equipment,
- All of waste water generated by the plant enters to sewage treatment workshop, and be neutralized, filtered and purified by weak alkali until it is pollution-free and recyclable
- Noise generated by our equipment,solved by below measure: choose the fan and pump with ultra-low noise and small operating vibration characteristics, adopting vibration reduction and sound insulation measures, soft connection of the fan inlet and outlet pipelines should be adopted to improve the Aerodynamic noise
- Soot, ash, and dust are collectively for drying, used as auxiliary materials for making bricks.
- Waste Catalyst can be regenerated and recycled

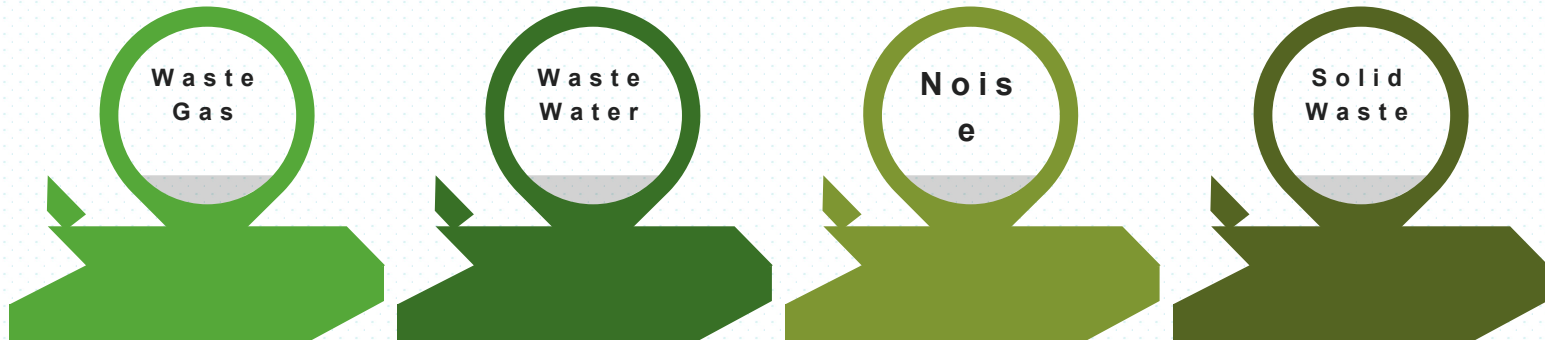



08

► **Safety Management**

Safety Management

1. Design Basis

In order to implement the guiding spirit of National on the safe production of enterprises and ensure the health of employees, this project has fully considered the requirements of safe production and industrial hygiene, in our design strictly complied with the safety and health regulations. The main technical documents are as follows:

- (1) «Hygienic standards for industrial enterprise design» GBZ 1-2010
- (2) «Safety and health design for chemical enterprises» HG20571-2014
- (3) «Classification and marking of commonly and hazardous chemicals» GB13690-2009
- (4) «Fire protection design of petrochemical enterprises» GB50160-2008
- (5) «Fire prevention regulation in architectural design» GB50016-2014
- (6) «General rules for storage of common and hazardous chemicals» GB15603-1995
- (7) «Configuration and design of building fire extinguishers» GB50140-2010
- (8) «Design of electrical installations in explosion and fire hazards» GB50058-2014
- (9) «Provisions on transportation design of chemical enterprises» GB50489-2009
- (10) «Design of electrostatic grounding in chemical enterprises» HG/ T20675-1990

Safety Management

2. Technical Measures

- (1) Hazardous waste shall be collected regularly and separately, all containers and packaging materials shall be compatible with the waste and strong enough. Meanwhile, distinctive and durable marks shall be stuck, strictly avoid reactions or explosion accidents happen between different wastes.
- (2) Hazardous wastes transportation shall strictly comply with the provisions of national governing. Mixed transport of incompatible hazardous wastes is prohibited; Formulate reasonable and perfect plans for the hazardous waste collection and transportation, optimize transportation routes and collection time; Vehicles with hazardous waste shall be clearly marked and maintained regularly to ensure their good condition and safe driving to avoid accidents as far as possible.
- (3) Formulate emergency measures and preventive measures for unexpected accidents during transportation, deal with unexpected accidents in time to reduce casualties and property losses.
- (4) Once hazardous waste are stored in temporary warehouse, should classified registration and storage . Unclear records, missing records or excessive waste storage time are strictly prohibited.
- (5) During pre-processing operation, strictly follow the relevant operating procedures to prevent accidents, which caused by weak sense of responsibility, should also formulate a series of emergency treatment measures.
- (6) Full-time safety management person should be provided, and all staff should get safety education before starting work; The operator shall be equipped with safety helmet, clothing, gloves, shoes and other personal labor protection products.
- (7) Exposed rotating part of the equipment should be equipped with safety shield, safety fence or protective baffle;
- (8) Lightning protection and grounding measures are taken into account for electrical equipment. The safety of low-voltage power distribution system is designed according «low-voltage power distribution design ».
- (9) Fortification of all structures and intercepting DAMS shall be conducted according to the basic seismic intensity of 7.

Safety Management

3. Industry hygiene

- (1) Workers who touch with hazardous waste shall be provided with necessary labor protection;
- (2) All operation rooms, office buildings and staff dormitories are equipped with air conditioners to ensure good operation and living environment;
- (3) No wall in the waste water treatment workshop, which can enhance the ventilation effect and reduce the harm of acid fog in the workshop to human body. Other treatment workshop is equipped with half wall, good ventilation and lighting effect;
- (4) Temporary storage warehouse and repair workshop shall be equipped with axial fan for ventilation, the laboratory shall be equipped with fume hood for ventilation;
- (5) Arrange the layout drawing reasonably, living areas should be upwind of the pretreatment and landfill facilities to avoid the influence of air pollution sources;
- (6) Staff canteen shall be designed and managed in accordance with the «food hygiene law» and relevant standards to ensure the food hygiene and safety for staff.

Safety Management

4. Fire Safety

Design Basis

*«Fire Protection Design of Buildings» GB50016-2014

*«Design of fire prevention in petrochemical enterprises» GB50160-2008

*«Rules for electrostatic grounding in chemical enterprises» HG/T20675-1990

*«Design of fire extinguishers in buildings» GB50140-2005

*Other existing laws and regulations

Design Philosophy

*Safety first

*Prevention First

*Production must be safe

*Safety for production

Fire Equipment


Water and foam fire protection system; Chemical fire: fire extinguisher and Other measures: fire passageway, electrical fire prevention, fire station, etc



09

► 3D Finish Drawing

3D Finish Drawing

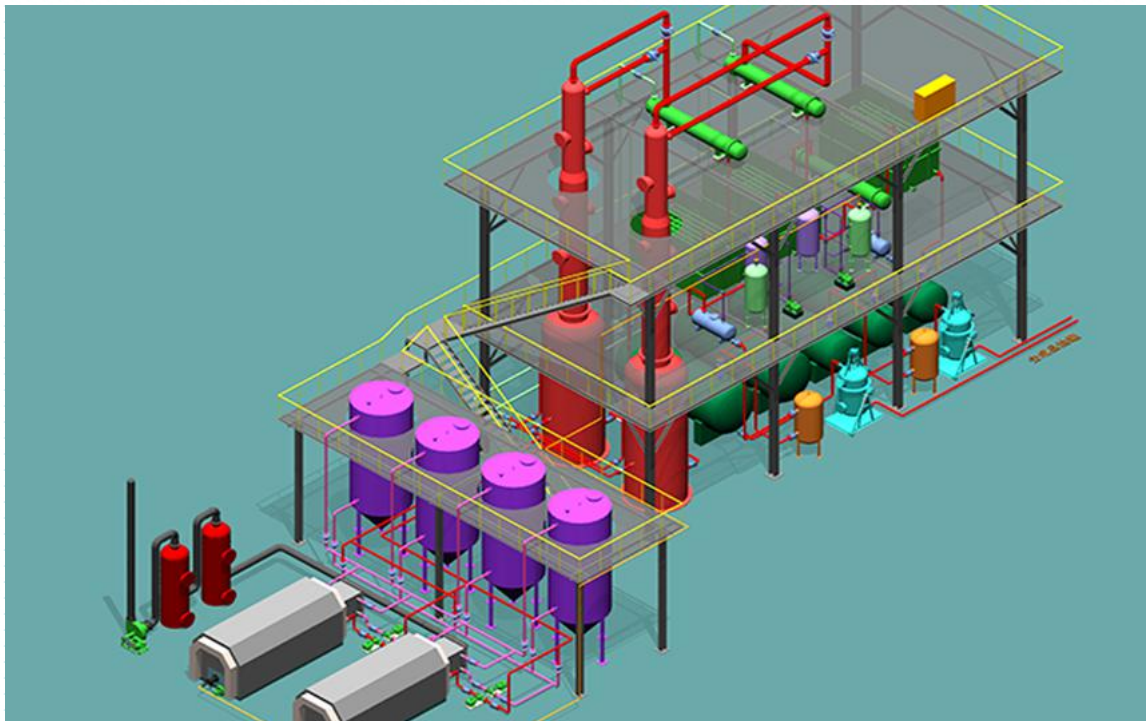

This technology mainly based on the decomposition principle of polymer compounds, through professional crackers, primary distillation towers, high-efficiency atmospheric spiral fractionation towers, high vacuum decompression spiral rectification towers, stripping towers, catalytic reactors, condensers, solvent refining equipment, Coking catalyst tower and other patented equipment, unique design, national initiative, unique technology, one-step processing with comprehensive chemical and physical reactions for waste mineral oil, waste engine oil and other waste oil, produce Naphtha, diesel, other industrial fuel oils and by products.



Success Stories

Success Stories



Success Stories



Project Evaluation



Evaluation Conclusion

This project take used engine oil and other waste oil as raw material, adopt new advanced equipment, take advantage of new technology for recycling waste oil, convert waste to be energy. Not only reduce environment pollution, improve living environment, but also save energy, alleviate the shortage of resources. This project conforms to international industrial policy of resource conservation and comprehensive utilization, can also provide many employment opportunity, has good social benefits.



► **Why Choose Us**

Choose Us

1 10 Years Experience

Our company has 10 years R&D, manufacturing and service experience, served thousands customers, updating our technology according customer running practical feedback, now has 8th generation oroduction,updating technology for better serving customers,meet customer requirement while apply government license.

2 Eco-Friendly Environmental

Machine equip with professional and advanced gas treatment system,ensure emission meet national emission standard; Actively respond government slogan "green water and green mountains are golden and silver", no pollution to the environment.

3 After-Sale Service

Once Machine arrive to buyer site, we send technician to buyer site for free installation, commissioning and training.Technician couldn't leave buyer site until buyer fully operating the machine and maintenance skills..

4 Qualitive Product

Technology department in charge of the machine design and production guidance. Manufacture department in charge of producing according technology department drawings and engineer on-site guidance.QC department in charge of inspection to ensure that each part is qualified for delivery.

5 Honor

Company has got CE certification, ISO9000 and ISO14001, also got the honor of 'Qualified products of National Standard'

6 Export Production

Since 2008, our production has been exported to Malaysia,Thailand,Korea,Philli pines,Portugal,Russia, Middle East area, etc...more than 60 countries, send engineers to buyer site for installation, commissioning and training.



Contact Us

Contact Us

Shangqiu Zhongming Eco-Friendly Equipment Co., Ltd

Address:Yilong Industry Zone, No.166 of Bayi Xi Road,Liangyuan District, Shangqiu city,
Henan Province.

Tel:0086-15237020017(Same as Wechat/Whatsapp/Skype)

Web: <http://www.sqzhongming.cn>

Mail: zhongminggroup@163.com

Tel:0086-370-2940008 **Fax:**0086-370-2288816



Website Code



Wechat Code

Contact Us

