


## SiCFS-0151-DO-T-520



### Specifications - SiCFS-0151-DO-T-520

Membrane material	Silicon Carbide (SiC)
O-ring material	EPDM/NBR/Viton
Cap material	Glass fiber/PPS (NSF61)
Active membrane surface	0,151 m <sup>2</sup>
Pore rating	MF/UF
pH range	1-13
Overall dimensions	L532xW150xT6/11mm
Fits into permeate manifold hole of	Ø9,6mm H7
Maximum permeate flow	300 ltr/hour
Maximum suction pressure	-0,6 bar
Maximum backwash pressure	2 bar
Operating temperature	5-60° C

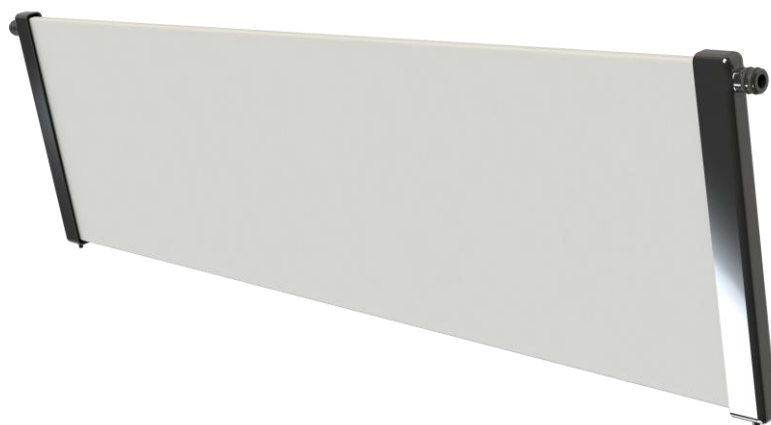

Certified to  
NSF/ANSI 61